

The Ash outdoor wall sconce is a modern take on the classic industrial-style light fixture. The Ash features a sleek metal shade and clear diffuser that creates a column of diffused light from under the shade. Ash wall sconces feature energy-efficient, fully dimmable integrated LED lighting. Available in four sizes (8", 10", 12", 16") and two finishes: Bronze and Charcoal.

### Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized acrylic lensing
- IP-65 Rated

### SPECIFICATIONS

DELIVERED LUMENS	529 or 1114 with clear cylinder 381 or 675 with clear lens
WATTS	8 or 18
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	Photocontrol / In-Line Fuse / Surge Protector
CCT	2700K or 3000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B1-U0-G0
DARK SKY	Compliant (Lensed version only)
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.



ASH 10  
shown in bronze/clear cylinder




ASH 10  
shown in charcoal/clear lens

### ORDERING INFORMATION

7000WASH	CRI / CCT	LENGTH	LENS	FINISH	VOLTAGE	OPTIONS
<b>L927</b>	LED LO-OUTPUT 90 CRI, 2700K	10 10"	<b>C</b> CLEAR CYLINDER <b>D</b> CLEAR LENS	<b>Z</b> BRONZE <b>H</b> CHARCOAL	<b>UNV</b> 120V-277V UNIVERSAL	<b>PC</b> NONE BUTTON PHOTOCONTROL <b>LF</b> IN-LINE FUSE <b>SP</b> SURGE PROTECTION <b>PCLF</b> BUTTON PHOTOCONTROL & IN-LINE FUSE <b>PCSP</b> BUTTON PHOTOCONTROL & SURGE PROTECTION <b>LFSP</b> IN-LINE FUSE & SURGE PROTECTION <b>PCLFSP</b> BUTTON PHOTOCONTROL, IN-LINE FUSE & SURGE PROTECTION
<b>H927</b>	LED HI-OUTPUT 90 CRI, 2700K					
<b>L930</b>	LED LO-OUTPUT 90 CRI, 3000K					
<b>H930</b>	LED HI-OUTPUT 90 CRI, 3000K					

# ASH 10 WALL SCONCE

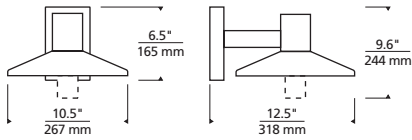


Ash 10

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### ASH 10 WITH CLEAR LENS

Total Lumen Output: 381  
 Total Power: 8  
 Luminaire Efficacy: 48  
 Color Temp: 3000K  
 CRI: 90  
 BUG Rating: B1-U0-G0

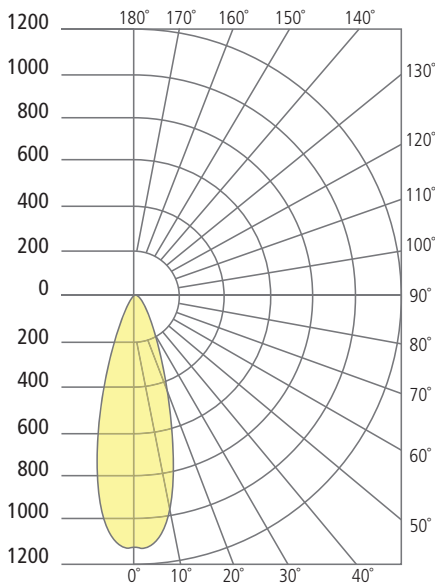

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---



© 2017 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.



GENERATION BRANDS  
 7400 Linder Avenue, Skokie, Illinois 60077

T 847.410.4400 F 847.410.4500