

The Ash outdoor wall sconce is a modern take on the classic industrial-style light fixture. The Ash features a sleek metal shade and clear diffuser that creates a column of diffused light from under the shade. Ash wall sconces feature energy-efficient, fully dimmable integrated LED lighting. Available in four sizes (8", 10", 12", 16") and two finishes: Bronze and Charcoal.

Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized acrylic lensing
- IP-65 Rated

SPECIFICATIONS

DELIVERED LUMENS	515 or 1189 with clear cylinder 300 or 613 with clear lens
WATTS	8 or 18
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	Photocontrol / In-Line Fuse / Surge Protector
CCT	2700K or 3000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B1-U1-G0
DARK SKY	Compliant (Lensed version only)
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

* Visit techlighting.com for specific warranty limitations and details.



ASH 8
shown in bronze/clear lens




ASH 8
shown in charcoal/clear cylinder

ORDERING INFORMATION

7000WASH	CRI / CCT	LENGTH	LENS	FINISH	VOLTAGE	OPTIONS
L927	LED LO-OUTPUT 90 CRI, 2700K	8 8"	C CLEAR CYLINDER D CLEAR LENS	Z BRONZE H CHARCOAL	UNV 120V-277V UNIVERSAL	NONE BUTTON PHOTOCONTROL
H927	LED HI-OUTPUT 90 CRI, 2700K					IN-LINE FUSE
L930	LED LO-OUTPUT 90 CRI, 3000K					SURGE PROTECTION
H930	LED HI-OUTPUT 90 CRI, 3000K					BUTTON PHOTOCONTROL & IN-LINE FUSE
						PC BUTTON PHOTOCONTROL & SURGE PROTECTION
						LF IN-LINE FUSE & SURGE PROTECTION
						SP SURGE PROTECTION
						PCLF BUTTON PHOTOCONTROL & SURGE PROTECTION
						PCSP BUTTON PHOTOCONTROL & SURGE PROTECTION
						LFSP IN-LINE FUSE & SURGE PROTECTION
						PCLFSP BUTTON PHOTOCONTROL, IN-LINE FUSE & SURGE PROTECTION

ASH 8 WALL SCONCE

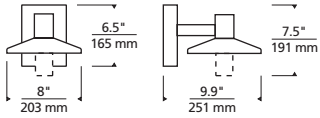


Ash 8

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

ASH 8 WITH CLEAR CYLINDER

- Total Lumen Output: 1189
- Total Power: 18
- Luminaire Efficacy: 66
- Color Temp: 3000K
- CRI: 90
- BUG Rating: B1-U1-G0

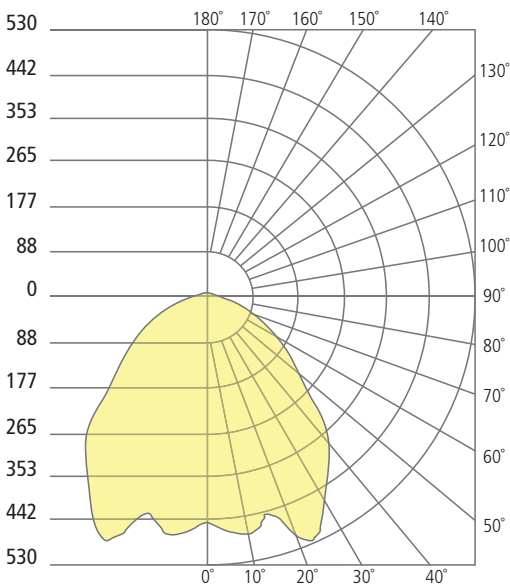

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES



GENERATION BRANDS
7400 Linder Avenue, Skokie, Illinois 60077

T 847.410.4400 F 847.410.4500



© 2017 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.