



GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.




This product is suitable for damp locations.

This product can be dimmed with a low-voltage electronic dimmer.

This product may be ceiling or wall mounted.

This instruction shows a typical installation.




CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


Use minimum 90°C supply conductors.

NOTE: Use a junction box large enough to house the driver.
Driver dimensions: L 2.66" x H .75" x W 1.23"

Install the Fixture Base

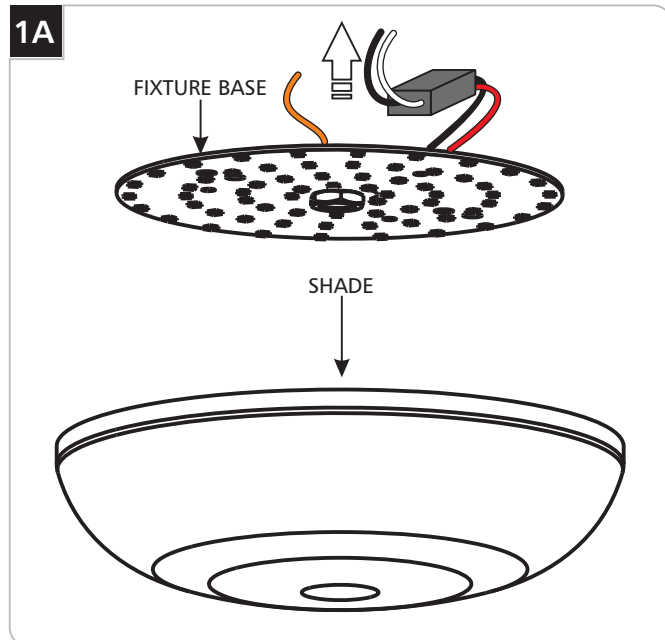


1 While supporting the shade, use a flathead screwdriver to separate the shade from the fixture base.

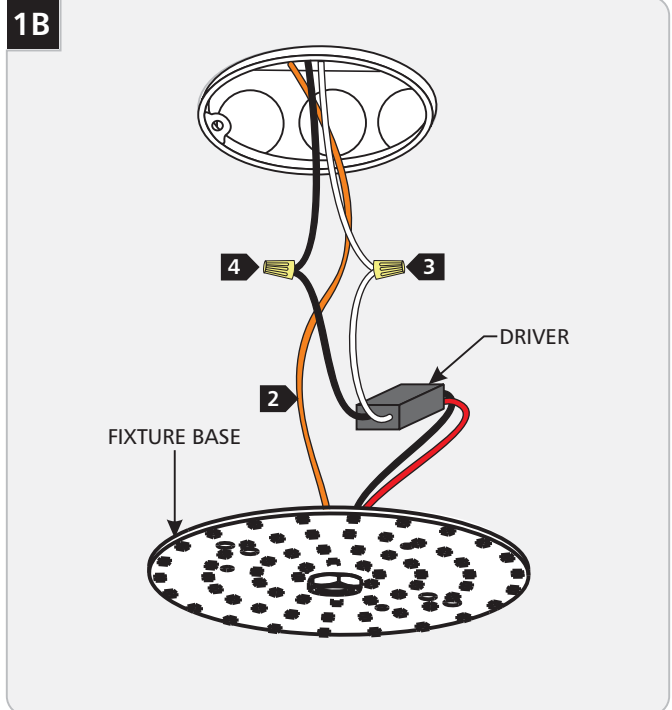

- 2** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 3** Connect the white driver fixture wire to the neutral power line wire with a wire nut.
- 4** Connect the black driver wire to the hot power line wire with a wire nut.


1C

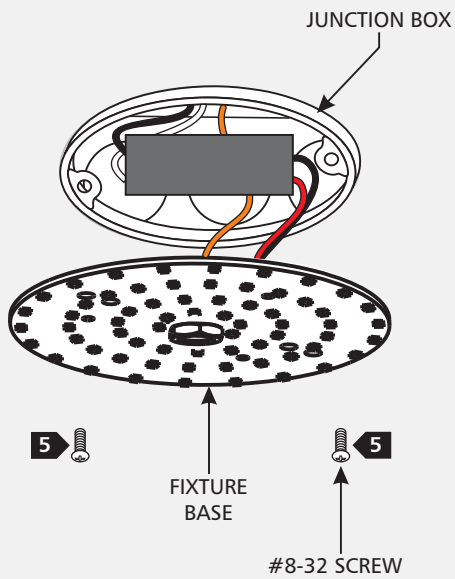

- 5 Properly place the driver, all wires, and wire nut connections into the junction box, secure the fixture base to the junction box with 2 #8-32 screws.

Install the Shade

2A

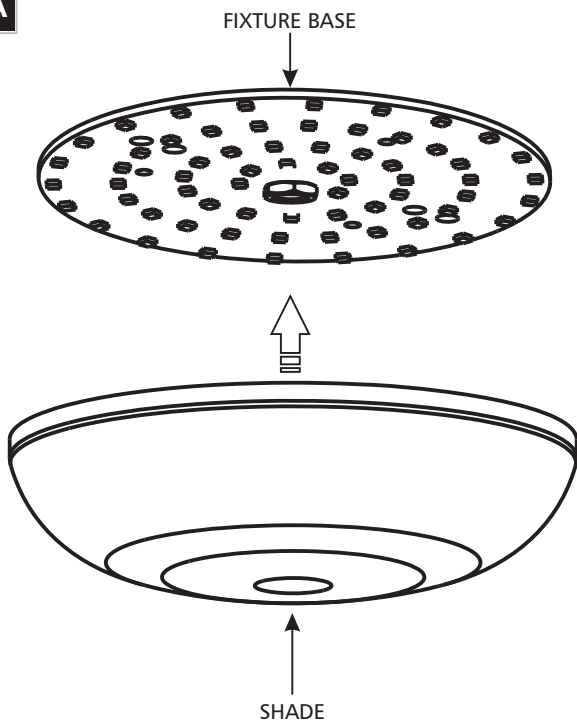

- 1 Install the shade by pushing it against the fixture base until it's secured with the magnets.

SAVE THESE INSTRUCTIONS!



7400 Linder Ave, Skokie, IL 60077
847.410.4400

www.techlighting.com

© 2017 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.
A Generation Brands Company