

The Aspen outdoor wall sconce creates an elegant elongated column of beautifully diffused light. The Aspen is available in four sizes (8", 15", 26", 36") to meet architectural scale; ideal for way-finding and general outdoor illumination. The Aspen features energy-efficient, fully dimmable integrated LED lamping. Available in two finishes: Bronze and Charcoal.

## High quality LM80-tested LEDs

for consistent long-life performance and color

## Outstanding protection against the elements:


- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing
- IP-65 Rated

## SPECIFICATIONS

DELIVERED LUMENS	1508
WATTS	48
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	In-Line Fuse / Surge Protector
CCT	2700K, 3000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B0-U4-G2
DARK SKY	Non-compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years



ASPEN 36  
shown in bronze

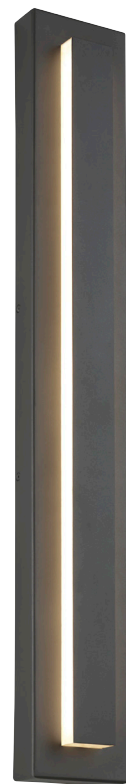


ASPEN 36  
shown in charcoal

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.

## ORDERING INFORMATION

7000WASP	CRI / CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
927	90 CRI, 2700K	36 36"	D DIFFUSE	Z BRONZE	UNV 120V-277V UNIVERSAL	S SYMMETRIC	NONE
930	90 CRI, 3000K			H CHARCOAL			LF IN-LINE FUSE SP SURGE PROTECTION LFSP IN-LINE FUSE & SURGE PROTECTION

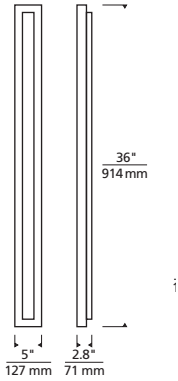


Aspen 36

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

**ASPEN 36**  
 Total Lumen Output: 1508  
 Total Power: 48  
 Luminaire Efficacy: 31  
 Color Temp: 3000K  
 CRI: 90  
 BUG Rating: B0-U4-G2

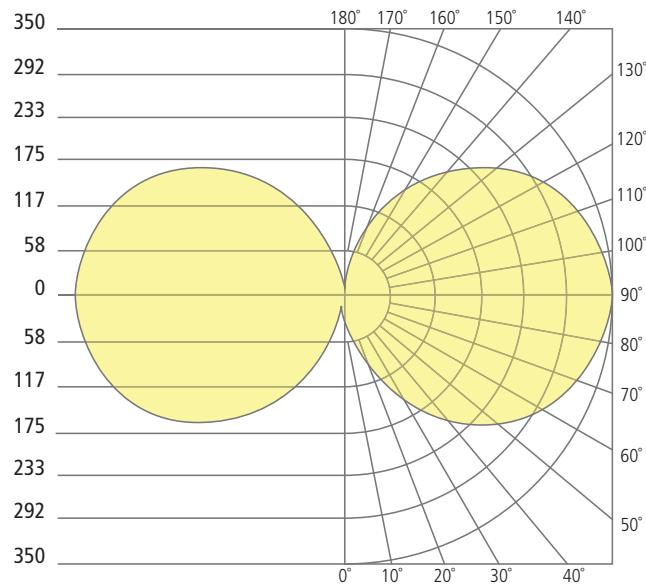

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---



© 2017 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.