

Simple elegance is taken to a whole new level with the Voto bollard. A minimalist die-cast metal body is topped with a symmetrical reveal cut from a solid piece of optically pure acrylic. Beautiful LED light pours from the bottom of the thick-cut acrylic to provide ample illumination.

High quality LM80-tested LEDs

for consistent long-life performance and color

Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

SPECIFICATIONS

DELIVERED LUMENS	683 (120V), 450 (12V)
WATTS	15
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver) or 12V
SECONDARY SURGE PROTECTOR	10kA
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric Downlight
MOUNTING OPTIONS**	Bolt
PERFORMANCE OPTIONS	Photocontrol / In-Line Fuse (120V)
CCT	2700K, 3000K or 4000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B0-U2-G1
DARK SKY	Compliant (Downlight)
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

* Visit techlighting.com for specific warranty limitations and details.
 **Bollard base not suitable for branch circuit through wiring.

ORDERING INFORMATION

7000BVOT	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
827	80 CRI, 2700K	42 42"	D DIFFUSE	Z BRONZE	UNV 120V-277V	S SYMMETRIC	NONE
830	80 CRI, 3000K			H CHARCOAL	12 12V*		PC BUTTON PHOTOCONTROL
840	80 CRI, 4000K						LF IN-LINE FUSE
							PCLF BUTTON PHOTOCONTROL & IN-LINE FUSE

*12V TRANSFORMER ORDERED SEPARATELY.





VOTO BOLLARD
shown in bronze

VOTO BOLLARD
shown in charcoal

12V AC TRANSFORMERS*

(OUTDOOR RATED, ORDERED SEPARATELY)

ITEM	DESCRIPTION	HOUSING	DIMMING
700OT150T	MAGNETIC, 150W, 120V	STAINLESS STEEL	MAGNETIC
700OT150T277	MAGNETIC, 150W, 277V	STAINLESS STEEL	MAGNETIC
700OT300T	MAGNETIC, 300W, 120V	STAINLESS STEEL	MAGNETIC
700OT300T277	MAGNETIC, 300W, 277V	STAINLESS STEEL	MAGNETIC

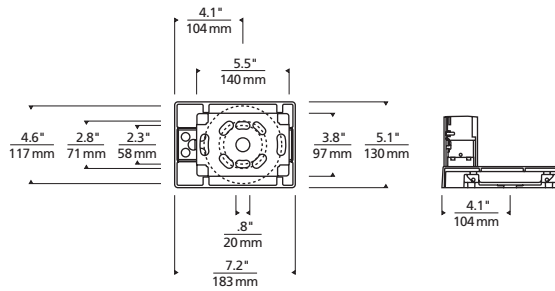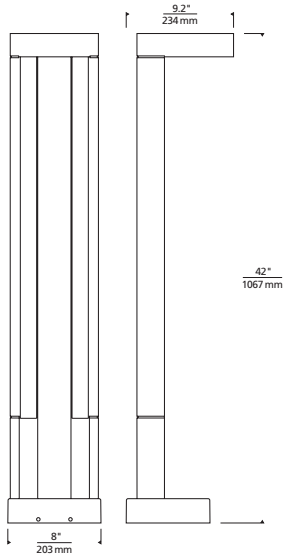

Voto Bollard


Anchor Plate Bolt Pattern

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

VOTO BOLLARD

- Total Lumen Output: 683.1
- Total Power: 14.9
- Luminaire Efficacy: 45.5
- Color Temp: 4000K
- CRI: 80+
- BUG Rating: BO-U2-G1

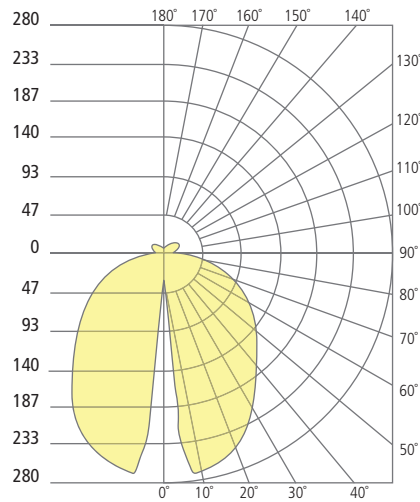

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES
