

PELÉ PENDANT

PRODUCT FEATURES

- Contemporary mid-century modern design
- Unique funneled glass detail
- Ideal for kitchen island task lighting, dining room lighting and bedroom lighting
- Fully dimmable halogen or LED lamping options create the desired ambiance
- Available lamping option includes energy efficient halogen and LED
- Protected by a 1-year warranty



White



White

LAMPING

Includes low-voltage, 50 watt frosted halogen bi-pin lamp or 6 watt, 297.2 total delivered lumen, 3000K, replaceable LED module. Dimmable with low-voltage electronic or magnetic dimmer (based on transformer). Includes six feet of field-cuttable cable.

ORDERING INFORMATION

| 700 | SYSTEM | PEL COLOR | FINISH | LAMP |
|-----|---------------|-----------|------------------|---|
| | FJ FREEJACK | W WHITE | R AGED BRASS | 12 VOLT HALOGEN (T20) |
| | KL KABLE LITE | | Z ANTIQUE BRONZE | -24 24 VOLT HALOGEN |
| | MP MONOPOINT | | C CHROME | -LEDS930 12 VOLT LED 90 CRI 3000K (T20/T24) |
| | MO MONORAIL | | S SATIN NICKEL | -24 24 VOLT HALOGEN |

Note. Note. MP includes 4" Round Flush Canopy.
 Antique Bronze is not available for Kable Lite.
 Chrome not offered on Monorail & Two-Circuit Monorail.

700 _____ PEL _____

JOB NAME _____


NOTES _____



PELÉ PENDANT

SPECIFICATIONS

| | |
|-------------------------------|----------|
| HARDWARE MATERIAL | Metal |
| SHADE MATERIAL | Glass |
| NET WEIGHT | 1.20 lbs |
| HEIGHT | 10in |
| WIDTH | 6.5in |
| LENGTH | 6.5in |
| UP LIGHT / DOWN LIGHT / BOTH? | |
| WET LISTED | |
| DAMP LISTED | |
| DRY LISTED | |
| MIN. HANGING HEIGHT | 10in |
| MAX HANGING HEIGHT | 82.5in |
| SLOPED CEILING ADAPTABLE? | |
| GENERAL LISTING | |
| INCLUDES | |

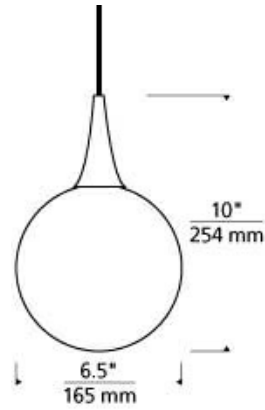

LAMPING SPECIFICATIONS

| | LED LAMP | INTEGRATED LED | NON LED | NO LAMP |
|-----------------------|-------------|----------------|-------------|---------|
| DELIVERED LUMENS | 500 | 300 | | |
| WATTS | 8 | 8 | 50 | |
| MAX WATTAGE PER BULB | 8W | 8W | 50W | |
| INPUT VOLTAGE | 12V 120V | 12V 120V | 12V 120V | |
| DIMMING TYPE* | ELV | ELV | ELV | |
| CCT | 3000K | 3000K | | |
| CRI | 90 CRI | 90 CRI | | |
| LED LIFETIME | | | | |
| L70 | | | | |
| AVERAGE BULB HOURS | 25000 | 25000 | | |
| FIELD SERVICEABLE LED | | | | |
| LAMP BASE | GY 6.35 | GY 6.35 | GY 6.35 | |
| LAMP SHAPE | T4 | T4 | T4 | |
| LAMP INCLUDED? | Y | Y | Y | |
| WARRANTY** | 1 Year | 5 Years | 1 Year | |

* Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 INFORMATION

| | Integrated LED | Replacement LED Lamp | No Lamp * |
|---|----------------|----------------------|-----------|
| This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6. | Yes | | |
| This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California. | Yes | | |

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

