

PRODUCT FEATURES

- Elegant and simple design
- Modern updated design to the classic fabric drum shade
- Features wood trim detail for added warmth and visual appeal
- Also available from Tech Lighting is the Topo Pendant and Topo Suspension
- Ideal in hallways, bedrooms and closets
- Protected by a 1-year warranty



LAMPING

The bands of wood trim are spline joined around the circumference of the shade, a delicate feat of quality craftsmanship. Rated for (4) 60w max, E26 medium based lamps. LED version includes (4) 9.5w, 800 delivered lumens, 2700K, medium base LED A19 lamps. LED dimmable with LED compatible dimmer.

White



Heather Gray

White

ORDERING INFORMATION

700FMTPO	COLOR	FINISH	LAMP
	Y HEATHER GRAY	S SATIN NICKEL	NO LAMP
	W WHITE		

700FMTPO _____

JOB NAME _____

NOTES _____




TOPO FLUSH MOUNT



SPECIFICATIONS

HARDWARE MATERIAL	Metal
SHADE MATERIAL	Metal
NET WEIGHT	5 lbs
HEIGHT	9.3in
WIDTH	20in
LENGTH	20in
UP LIGHT / DOWN LIGHT / BOTH?	
WET LISTED	
DAMP LISTED	
DRY LISTED	
WALL / CEILING MOUNT	
GENERAL LISTING	
INCLUDES	

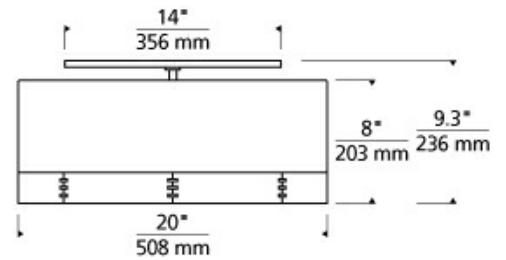

LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS				
WATTS				
MAX WATTAGE PER BULB			240W	
INPUT VOLTAGE			120V	
DIMMING TYPE*			ELV, TRIAC	
CCT				
CRI				
LED LIFETIME				
L70				
AVERAGE BULB HOURS				
FIELD SERVICEABLE LED				
LAMP BASE			E26 Medium Base	
LAMP SHAPE			T6	
LAMP INCLUDED?			Y	
WARRANTY**			1 Year	

*Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6.			N/A
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.			N/A

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

