

FOLIUM PENDANT

PRODUCT FEATURES



LAMPING

Includes 6 watt, 240 net lumen, 80 CRI 3000K LED module. Ships with six feet of field-cuttable suspension cable. Dimmable with low-voltage electronic or magnetic dimmer (based on transformer).

Satin Nickel



Satin Nickel

ORDERING INFORMATION

700	SYSTEM	FLM	COLOR	FINISH	LAMP
	FJ FREEJACK KL KABLE LITE MP MONOPOINT MO MONORAIL		S SATIN NICKEL	S SATIN NICKEL	-LED 12 VOLT LED 3000K

Note: Note: MP includes 4" Round Flush Canopy.

700 _____ FLM _____

JOB NAME _____


NOTES _____



FOLIUM PENDANT

SPECIFICATIONS

HARDWARE MATERIAL
SHADE MATERIAL
NET WEIGHT
HEIGHT
WIDTH
LENGTH
UP LIGHT / DOWN LIGHT / BOTH?
WET LISTED
DAMP LISTED
DRY LISTED
MIN. HANGING HEIGHT
MAX HANGING HEIGHT
SLOPED CEILING ADAPTABLE?
GENERAL LISTING
INCLUDES

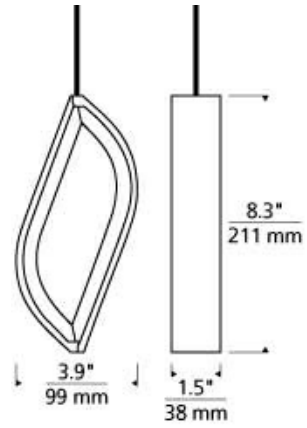

LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS				
WATTS				
MAX WATTAGE PER BULB				
INPUT VOLTAGE				
DIMMING TYPE*				
CCT				
CRI				
LED LIFETIME				
L70				
AVERAGE BULB HOURS				
FIELD SERVICEABLE LED				
LAMP BASE				
LAMP SHAPE				
LAMP INCLUDED?				
WARRANTY**				

*Dimming information available at www.techlighting.com/Downloads#dimming
 ** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6.			
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.			

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

