

PRODUCT FEATURES

- Modern design with high-power functionality
- Acrylic lens provides a glare-free lighting experience
- Provides ample light as a task light or general
- Available in three on-trend finish options
- Fully dimmable-with an electronic low-voltage dimmer
- Protected by a 1-year warranty



LAMPING

Includes two GX24Q-2 base 18 watt triple tube compact fluorescent lamps (electronic ballast included) or 20 watt, 1200 net lumen, 3000K LED modules. LED version dimmable with low-voltage electronic dimmer. May be mounted horizontally or vertically. ADA compliant.

Satin Nickel



Chrome

Satin Nickel

ORDERING INFORMATION

700BCALD	COLOR	FINISH	LAMP
	Y ACRYLIC	C CHROME S SATIN NICKEL	-LED830 LED 80 CRI 3000K 120V -LED830-277 LED 80 CRI 3000K 277V

700BCALD _____

JOB NAME _____


NOTES _____



ALDEN BATH

SPECIFICATIONS

HARDWARE MATERIAL	Metal
SHADE MATERIAL	Metal
NET WEIGHT	4 lbs
HEIGHT	4.8in
WIDTH	3.8in
LENGTH	26in
WET LISTED	
DAMP LISTED	
DRY LISTED	
GENERAL LISTING	
INCLUDES	

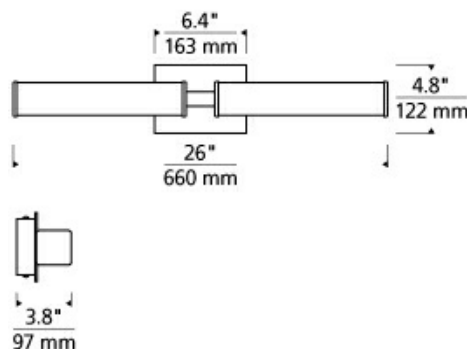

LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS		1200		
WATTS		20		
MAX WATTAGE PER BULB		20W		
INPUT VOLTAGE		120V 277V		
DIMMING TYPE*		Acrylic : ELV, TRIAC Acrylic : 0-10V		
CCT		3000K		
CRI		80 CRI		
LED LIFETIME				
L70				
AVERAGE BULB HOURS		50000		
FIELD SERVICEABLE LED				
LAMP BASE		Integrated LED		
LAMP SHAPE		T3		
LAMP INCLUDED?		Y		
WARRANTY**		5 Years		

* Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6.	No		
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.	N/A		

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

