

PRODUCT FEATURES

- Premium quality construction and light output with your choice of modern finishes
- Mounts horizontally or vertically for added versatility
- Two length options including 24" and 36"
- Fully dimmable LED lamping options to create the desired ambiance
- High quality, long-lasting integrated LED lamping included to save you time and money
- Protected by a 5-year warranty, please visit www.techlighting.com for details



LAMPING

Includes 20 watt, 591 delivered lumen, 2700K LED module. Mounts horizontally or vertically. Dimmable with low-voltage electronic dimmer.

Satin Nickel



Satin Nickel



White

ORDERING INFORMATION

700BCTFN	LENGTH (A)	FINISH	LAMP
	24 24"	S SATIN NICKEL W WHITE	-LED927 LED 90 CRI 2700K 120V -LED927-277 LED 90 CRI 2700K 277V

700BCTFN _____

JOB NAME _____


NOTES _____



TIFFIN 24 BATH

SPECIFICATIONS

HARDWARE MATERIAL	Metal
SHADE MATERIAL	Metal
NET WEIGHT	4 lbs
HEIGHT	4.3in
WIDTH	4.5in
LENGTH	24in
WET LISTED	
DAMP LISTED	
DRY LISTED	
GENERAL LISTING	
INCLUDES	

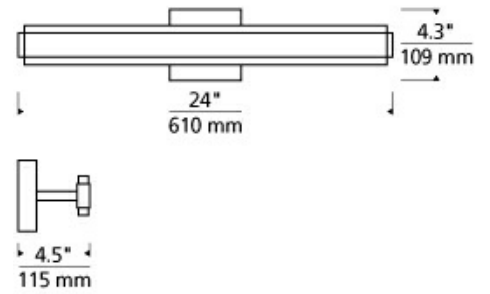

LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS		591		
WATTS		20		
MAX WATTAGE PER BULB		20W		
INPUT VOLTAGE		120V 277V		
DIMMING TYPE*		ELV, TRIAC 0-10V		
CCT		2700K		
CRI		90 CRI		
LED LIFETIME				
L70				
AVERAGE BULB HOURS		50000		
FIELD SERVICEABLE LED				
LAMP BASE		Integrated LED		
LAMP SHAPE		T3		
LAMP INCLUDED?		Y		
WARRANTY**		5 Years		

* Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6.	No		
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.	N/A		

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

