

DOBSON II 4-LIGHT BATH

PRODUCT FEATURES

- Sleek and ultra-modern cylindrical glass shade
- Gorgeous pure optic crystal illuminated ring
- Fully dimmable integrated LED lamp
- Complementary Dobson wall sconce, Dobson Pendant and Dobson Grande pendant also available by Tech Lighting
- Ideal for kitchen island task lighting, bedroom lighting and home office lighting
- 5 year warranty with LED lamping option, visit techlighting.com for more warranty details



LAMPING

Includes 120 volt 43 watt, 2623 delivered lumens, 3000K LED module.
Dimmable with low-voltage electronic dimmer.

Matte Black



Matte Black

Chrome

ORDERING INFORMATION

700BCDBS	LENGTH (A)	FINISH	LAMP
	4 4"	C CHROME	-LED930 LED 90 CRI 3000K 120V
		B MATTE BLACK	-LED930-277 LED 90 CRI 3000K 277V

700BCDBS _____

JOB NAME _____


NOTES _____



DOBSON II 4-LIGHT BATH

SPECIFICATIONS

HARDWARE MATERIAL	Metal
SHADE MATERIAL	Glass
NET WEIGHT	6.5 lbs
HEIGHT	6.3in
WIDTH	4.3in
LENGTH	26.5in
WET LISTED	
DAMP LISTED	Yes
DRY LISTED	
GENERAL LISTING	
INCLUDES	

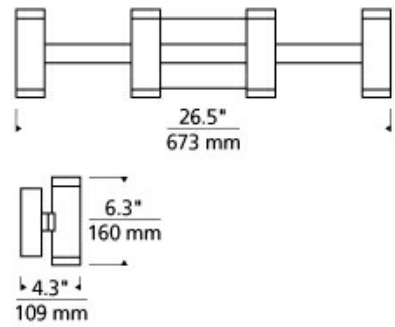

LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS		2623		
WATTS		5		
MAX WATTAGE PER BULB		43W		
INPUT VOLTAGE		120V 277V		
DIMMING TYPE*		ELV, TRIAC 0-10V		
CCT		3000K		
CRI		90 CRI		
LED LIFETIME				
L70				
AVERAGE BULB HOURS		50000		
FIELD SERVICEABLE LED				
LAMP BASE		Integrated LED		
LAMP SHAPE		T3		
LAMP INCLUDED?		Y		
WARRANTY**		5 Years		

* Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6.	Yes		
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.	N/A		

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

