

PRODUCT FEATURES

- Classic drum flushmount profile with random geometric pattern perforated around the lower perimeter of the metal shade for contemporary twist
- High performance, energy efficient integrated LED light source with 3,000K Color Temp and 90 CRI
- Fully dimmable with most ELV dimmers to create just the right atmosphere
- Steel construction for light, durable structure
- High quality acrylic diffuser softens the light
- Protected by a 5-year warranty



LAMPING

LED includes 22.7 watt 1040 delivered lumens 90 CRI 3000K LED module. Dimmable with a low-voltage electronic dimmer. 120v or 277v

White



White

ORDERING INFORMATION

700FMCS D FINISH

W MATTE WHITE

LAMP

- LED930 INTEGRATED LED 90 CRI 3000K 120V
- LED930-277 INTEGRATED LED 90 CRI 3000K 277V

700FMCS D _____

JOB NAME _____


NOTES _____



CROSSBLEND 14 FLUSH

SPECIFICATIONS

HARDWARE MATERIAL	Metal
SHADE MATERIAL	Steel
NET WEIGHT	4.5 lbs
HEIGHT	5in
WIDTH	13.9in
LENGTH	13.9in
UP LIGHT / DOWN LIGHT / BOTH?	
WET LISTED	
DAMP LISTED	Yes
DRY LISTED	
WALL / CEILING MOUNT	
GENERAL LISTING	
INCLUDES	

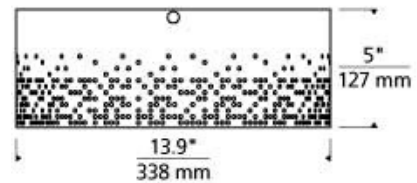

LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS		1040		
WATTS		22.7		
MAX WATTAGE PER BULB		22.7W		
INPUT VOLTAGE		120V 277V		
DIMMING TYPE*		ELV, TRIAC 0-10V		
CCT		3000K		
CRI		90 CRI		
LED LIFETIME				
L70				
AVERAGE BULB HOURS		50000		
FIELD SERVICEABLE LED				
LAMP BASE		Integrated LED		
LAMP SHAPE		T3		
LAMP INCLUDED?		Y		
WARRANTY**		5 Years		

* Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6.	Yes		
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.	N/A		

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

