

# Kulma Pendant

7000PKLM\_

1.0



OUTDOOR

### GENERAL PRODUCT INFORMATION:



This product is suitable for outdoor locations.

Dimmable with most LED compatible ELV, TRIAC, and 0-10V dimmers.


This instruction shows a typical installation.

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


**Use minimum 90°C supply conductors.**

**SAVE THESE INSTRUCTIONS!**

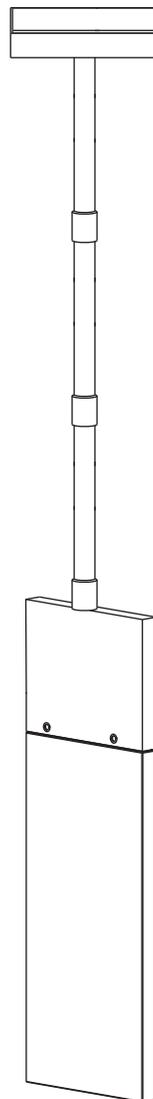

7400 Linder Ave., Skokie, IL 60077  
T 847.410.4400 | F 847.410.4500  
www.techlighting.com

## Install the Fixture

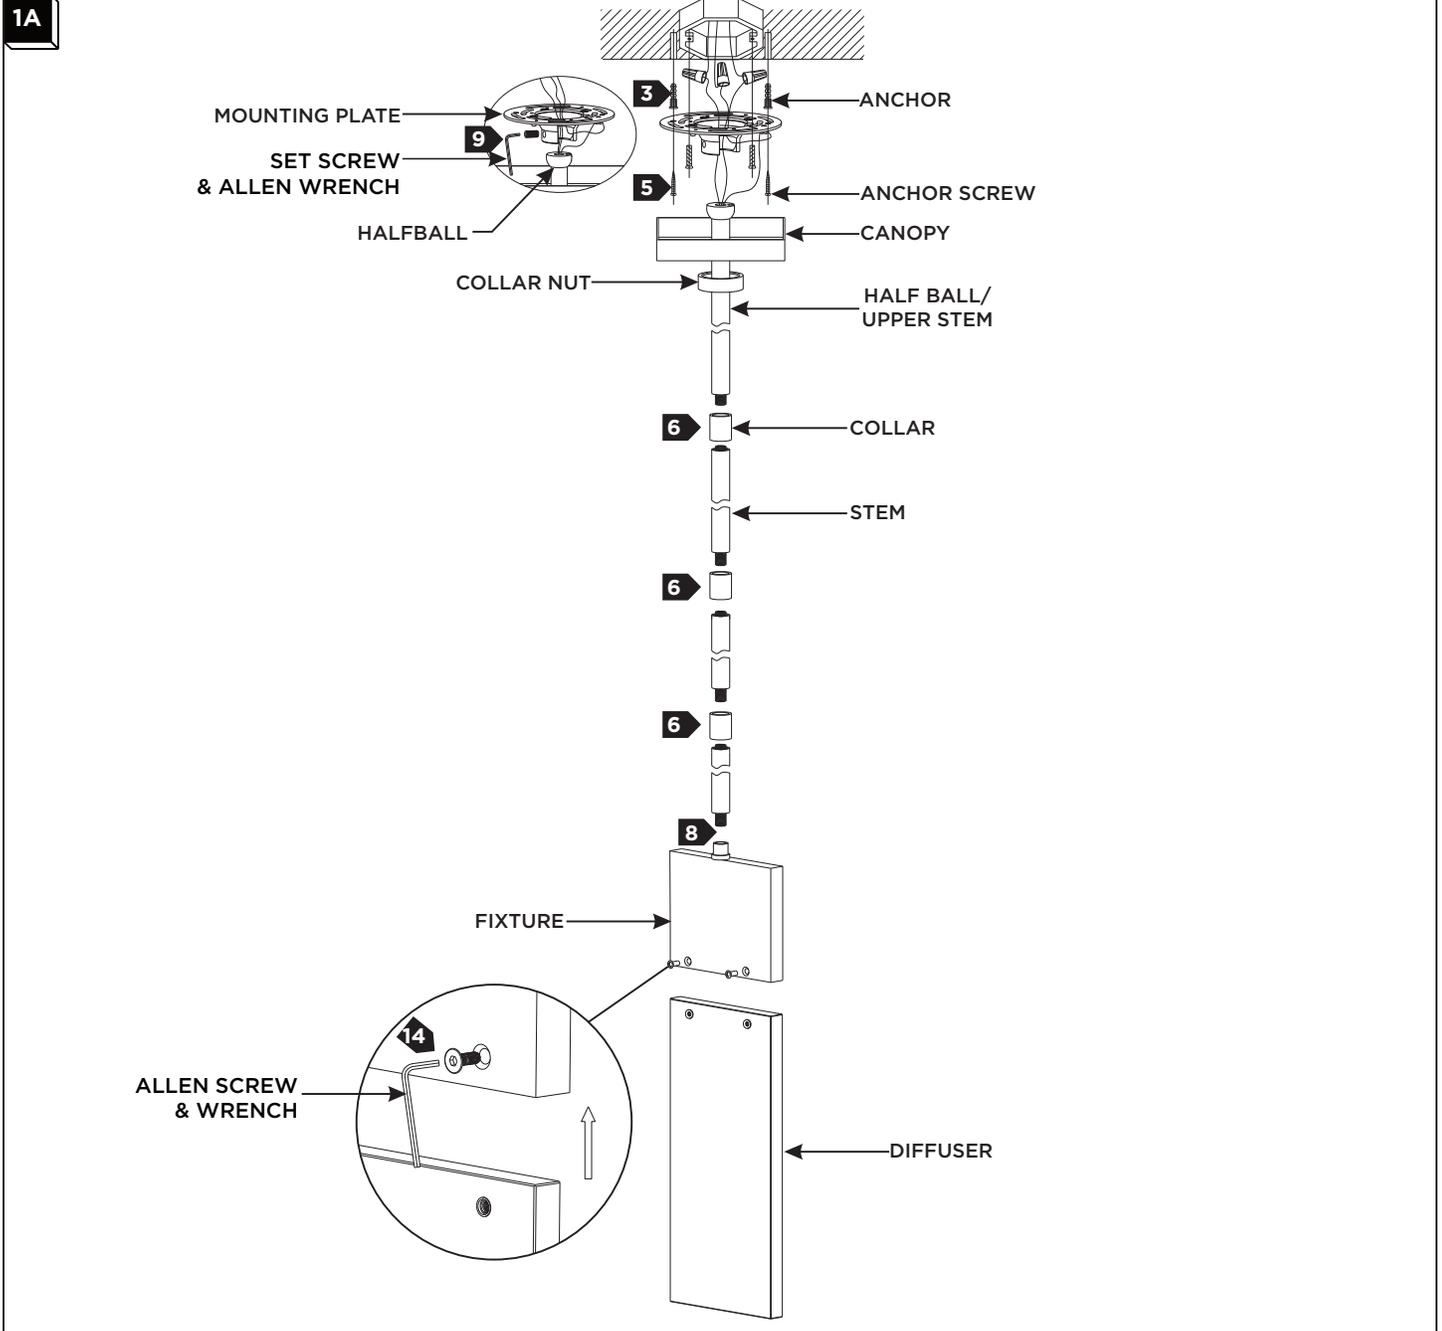

- 1** Temporarily install the mounting plate to the junction using the provided #8-32 screws.
- 2** Mark the anchor locations through holes on the mounting plate, then remove the mounting plate.
- 3** Drill appropriate sized holes at the marked locations and install the anchors.
- 4** Install the mounting plate to the junction box with the two provided #8-32 screws.
- 5** Screw the anchor screws into the anchors.
- 6** Determine the desired height of the fixture using the provided stems, collars, and half ball/upper stem, then assemble them by screwing them together.
- 7** Slide the canopy, then the collar nut onto the half ball/stem assembly.
- 8** Feed the fixture wires through the stem assembly, then screw the stem assembly to the top of the fixture.
- 9** Seat the half ball into the mounting plate ensuring no wires are being pinched. Tighten the set screw using the provided Allen wrench to fully secure the halfball in place.
- 10** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 11** Connect the white input driver wire to the neutral power line wire with a wire nut.
- 12** Connect the black input driver wire to the hot power line wire with a wire nut.
- 13** Neatly place the wire and wire nut connections inside the canopy/junction box, then slide the canopy up over the mounting plate and secure in place with the collar nut.
- 14** Install the diffuser to the fixture and secure it in place with the Allen screws using the provided Allen wrench.