

Vex Outdoor Wall

7000WVEX_ 1.2



GENERAL PRODUCT INFORMATION:



This product is suitable for wet locations.

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

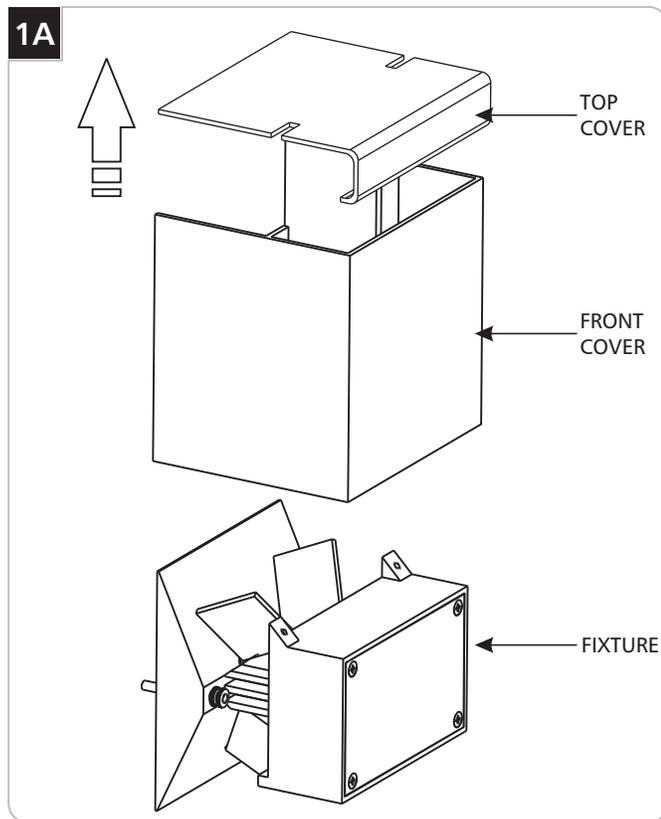
This product can be dimmed with most ELV, CL, TRIAC, or 0-10V dimmers.

This instruction shows a typical installation.

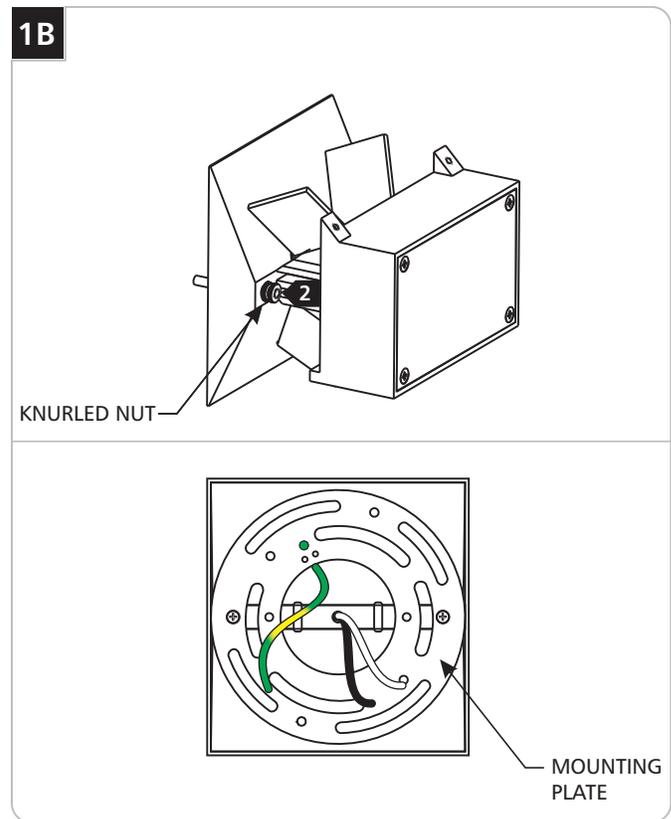
CAUTION - RISK OF FIRE
 This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

Install the Fixture

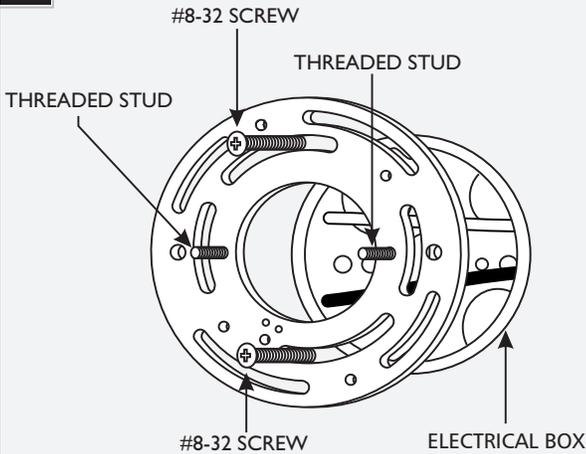


1 If necessary, remove the top cover, then slide the front cover off of the fixture.

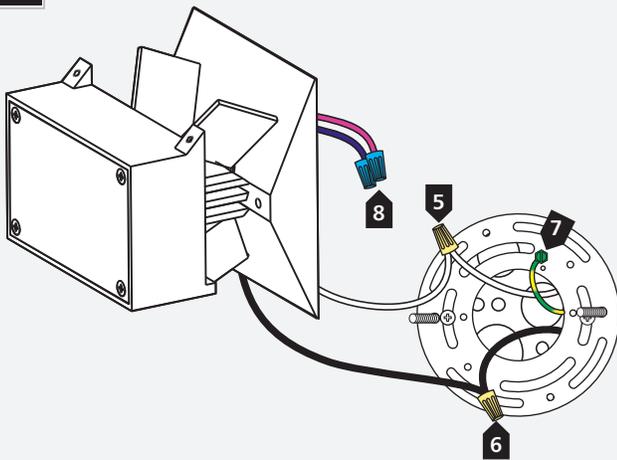


2 Unscrew and remove the knurled nuts.

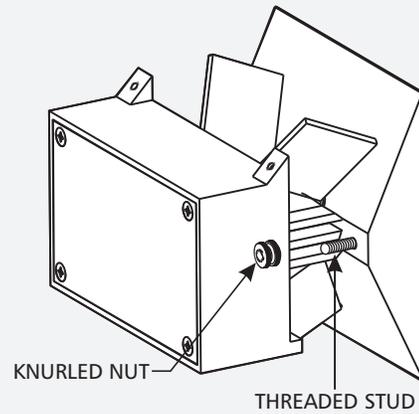
3 Remove the mounting plate from the back of the fixture.

1C

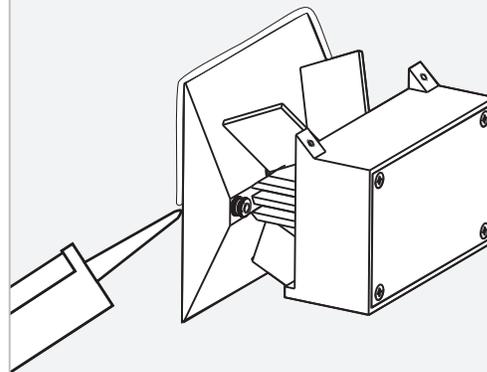
- 4** Align the two mounting studs horizontally and mount the mounting plate to the electrical box with the two #8-32 screws provided.

1D

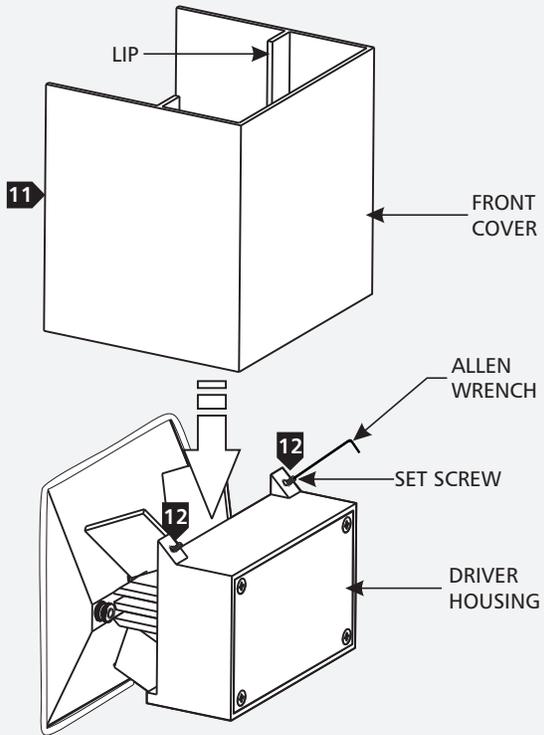
- 5** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 6** Connect the black fixture wire to the hot power line wire with a wire nut.
- 7** Connect the fixture to a suitable ground in accordance local electrical codes.
- 8** For 0-10V dimming, use the purple and gray/pink wires to connect to a compatible dimmer. If not using 0-10V dimming, make sure to cap off the purple and gray wires.

1E

- 9** Neatly tuck all wires and wire nut connections into the electrical box, mount the fixture onto the threaded studs, and secure it in place by screwing the knurled nuts onto the studs.

1F

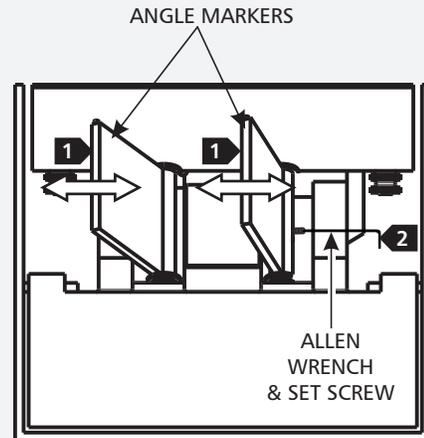
- 10** For wet locations, caulk around the base with waterproof construction sealant.

1G

NOTE: Make sure the sealant is dry before reinstalling the cover.

- 11** Install the front cover by sliding it back onto the fixture making sure the lips of the cover are behind the driver housing.
- 12** Secure the frontcover in place by tightening the set screws with the provided Allen wrench.

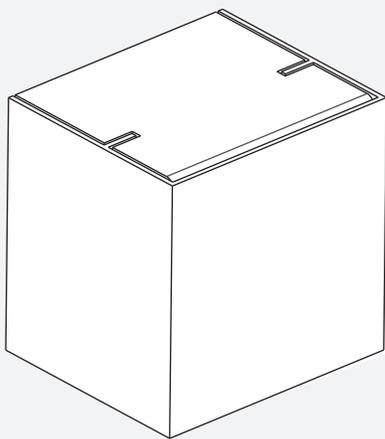
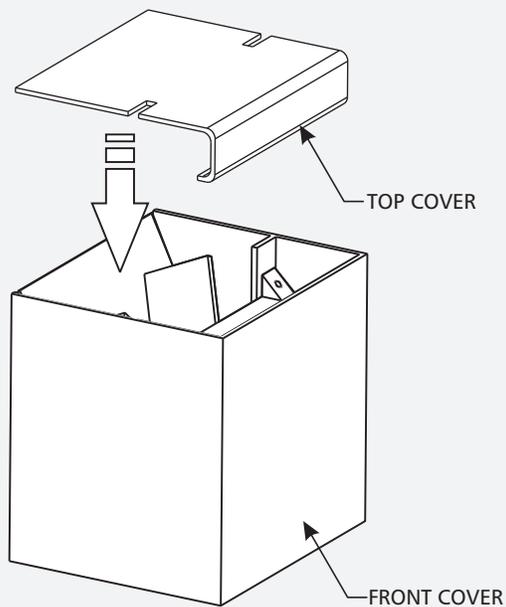
Adjust the Fixture

2A

- 1** The angle markers can be adjusted independently. Open and close the angle markers on the top and bottom of the fixture to the desired beam angle.
- 2** Tighten the set screws on the sides of the angle markers with the provided Allen wrench to lock them in place. **NOTE:** Medium and Large Models have set screws located on the sides of the fixture.

Install the Top Cover

3A



- 1 Install the top cover to the front cover as shown.
- 2 **Removing the Top Cover:** From underneath the fixture, use a screwdriver or similar object to carefully push the cover out.

 **TECH LIGHTING**

7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.techlighting.com