


The Aspen outdoor wall sconce creates an elegant elongated column of beautifully diffused light. The Aspen is available in four sizes (8", 15", 26", 36") to meet architectural scale; ideal for wayfinding and general outdoor illumination. The Aspen features energy-efficient, fully dimmable integrated LED lighting. Available in three finishes: Bronze, Charcoal, and Natural Brass.

### Outstanding protection against the elements:

- Powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized, frosted acrylic lensing
- IP65 Rated

### SPECIFICATIONS

DELIVERED LUMENS	1508
WATTS	48
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	In-Line Fuse / Surge Protector
CCT	2700K or 3000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B0-U4-G2
DARK SKY	Non-compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2019 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70; >60,000 Hours
WARRANTY*	5 Years
WEIGHT	9 lbs.



ASPEN 36 shown in charcoal



ASPEN 36 shown in bronze




ASPEN 36 shown in natural brass

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.

### ORDERING INFORMATION

PRODUCT	CRI / CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
7000WASP	927 90 CRI, 2700K 930 90 CRI, 3000K	36 36"	D DIFFUSE	Z BRONZE H CHARCOAL NB NATURAL BRASS	UNV 120V-277V UNIVERSAL	S SYMMETRIC	NONE LF IN-LINE FUSE SP SURGE PROTECTION LFSP IN-LINE FUSE & SURGE PROTECTION

# ASPEN 36 WALL SCONCE

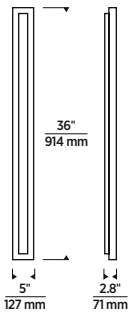


Aspen 36

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

**ASPEN 36**  
 Total Lumen Output: 1508  
 Total Power: 48  
 Luminaire Efficacy: 31  
 Color Temp: 3000K  
 CRI: 90  
 BUG Rating: B0-U4-G2

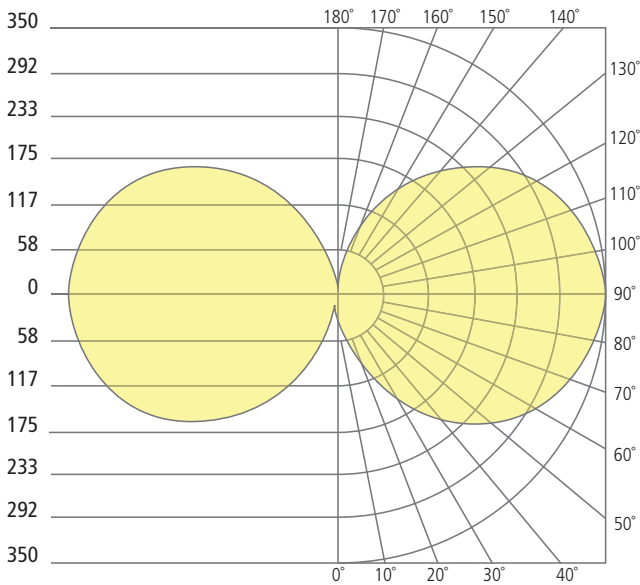

## PROJECT INFO

FIXTURE TYPE & QUANTITY	JOB NAME & INFO	NOTES

