

# MULTI-PORT CHANDELIERS


## FreeJack Rectangle Canopy 7-port

### DESCRIPTION

Mounts to a standard 4" junction box with round plaster ring (provided by electrician). 42"L x 14"W x 2.5" Depth Drywall anchors included for additional support. Includes electronic transformers and 7 low-voltage FreeJack ports.

### INSTALLATION

This product can mount to either a 4" square electrical box with round plaster ring or an octagonal electrical box (not included). For ceiling only. Transformers (included) fit in canopy.

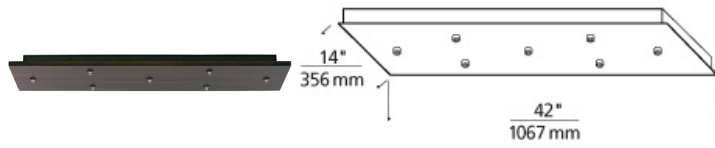

### WEIGHT

35lb / 15.88kg ±

walnut wood



maple wood

metal

walnut wood

### ORDERING INFORMATION

700FJLD7 SHAPE OR SIZE	COLOR	FINISH	VOLTAGE
RECTANGLE 7 PORT LINEAR INTEGRAL TRANSFORMER	<b>M</b> MAPLE WOOD <b>T</b> METAL <b>W</b> WALNUT WOOD	<b>Z</b> ANTIQUE BRONZE <b>S</b> SATIN NICKEL	120V IN/12V OUT

For use with any seven 12 Volt halogen FreeJack pendants or heads (sold separately).



Tech Lighting, L.L.C.

700FJLD7 \_\_\_\_\_

FIXTURE TYPE: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

NOTES: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_



©2018 Tech Lighting, L.L.C. All Rights Reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.