

# LOW - VOLTAGE PENDANTS

## Mini Dillon Pendant LED SORAA T20

### DESCRIPTION

Translucent organza drum with inner glass cylinder to provide a soft wash of light. Includes low-voltage, 50 watt halogen bi-pin lamp or 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module and six feet of field-cutable cable. Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer). Works with SORAA.

### INSTALLATION


Socket terminates with FreeJack male connector, which may be installed into a system connector. Elements ordered with a system prefix include a connector for that system.

### ACCESSORIES & OPTICAL CONTROLS

SORAA® LED Bi-Pin Replacement Pendant Module

### WEIGHT

1.75lb / 0.79kg ±

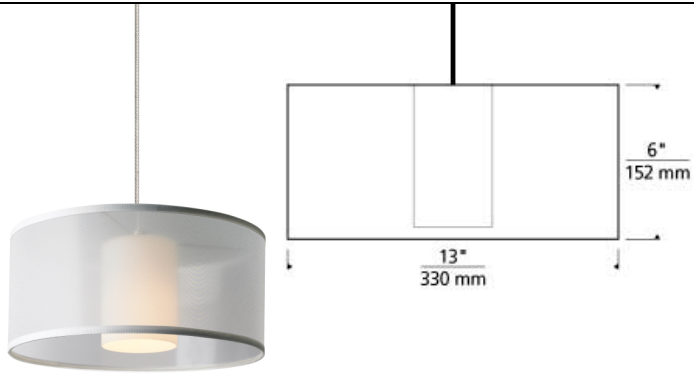

brown



brown



white

### ORDERING INFORMATION

700	SYSTEM	MDLNW	COLOR	FINISH	LAMP
FJ	FREEJACK		N BROWN	Z ANTIQUE BRONZE	12 VOLT HALOGEN (T20)
MP	MONOPOINT		W WHITE	C CHROME	-LEDS930 12 VOLT LED 90 CRI 3000K (T20/T24)
MO	MONORAIL			S SATIN NICKEL	-24 24 VOLT HALOGEN
MO2	TWO-CIRCUIT MONORAIL				

Note: MP includes 4" Round Flush Canopy. Note: MP includes 4 Round Flush Canopy.

Chrome not offered on Monorail & Two~Circuit Monorail.



**TECH LIGHTING®**  
 7400 Linder Avenue      T 847.410.4400  
 Skokie, Illinois 60077      F 847.410.4500

**Tech Lighting, L.L.C.**

700 \_\_\_\_ MDLNW \_\_\_\_

FIXTURE TYPE: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

NOTES: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_