

## PRODUCT FEATURES

- Simple yet sophisticated design style
- Can be used for task and ambient lighting
- Available in two on-trend colors, Chrome and Satin Nickel
- Fully-dimmable to create the desired ambiance in any bathroom
- ADA compliant
- Protected by a 1-year warranty

## LAMPING

Includes 33 watt, 1724 delivered lumens, 3000K LED module. Dimmable with most LED compatible ELV and Triac dimmers. 277v compatible with 0-10V dimmers. May be mounted horizontally and vertically. ADA compliant.



36" Bronze



36" Bronze



36" Satin Nickel

## ORDERING INFORMATION

700BCFINN LENGTH (A)	FINISH	LAMP
36 36"	S SATIN NICKEL	-LED930 LED 90 CRI 3000K 120V -LED930-277 LED 90 CRI 3000K 277V

700BCFINN \_\_\_\_\_

JOB NAME \_\_\_\_\_

NOTES \_\_\_\_\_


\_\_\_\_\_



# FINN 36 BATH

## SPECIFICATIONS

HARDWARE MATERIAL	Metal
SHADE MATERIAL	Acrylic
NET WEIGHT	2 lbs
HEIGHT	4.3in
WIDTH	2.3in
LENGTH	36.3in
WET LISTED	
DAMP LISTED	
DRY LISTED	
GENERAL LISTING	
INCLUDES	

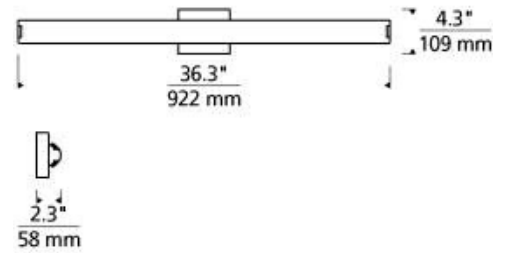

## LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS		1723.8		
WATTS		33		
MAX WATTAGE PER BULB		33W		
INPUT VOLTAGE		120V 277V		
DIMMING TYPE*		ELV, TRIAC 0-10V		
CCT		3000K		
CRI		90 CRI		
LED LIFETIME				
L70				
AVERAGE BULB HOURS		50000		
FIELD SERVICEABLE LED				
LAMP BASE		Integrated LED		
LAMP SHAPE		T3		
LAMP INCLUDED?		Y		
WARRANTY**		5 Years		

\* Dimming information available at [www.techlighting.com/Downloads#dimming](http://www.techlighting.com/Downloads#dimming)

\*\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.

## T20 / T24 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 <b>Title 24</b> Part 6.	Yes		
This product can be used to comply with California Appliance Efficiency Standards 2016 <b>Title 20</b> and may be shipped to and sold in California.	N/A		

\* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

